



DOMICET CREPE - 3043




DOMICET CETUS - 3088

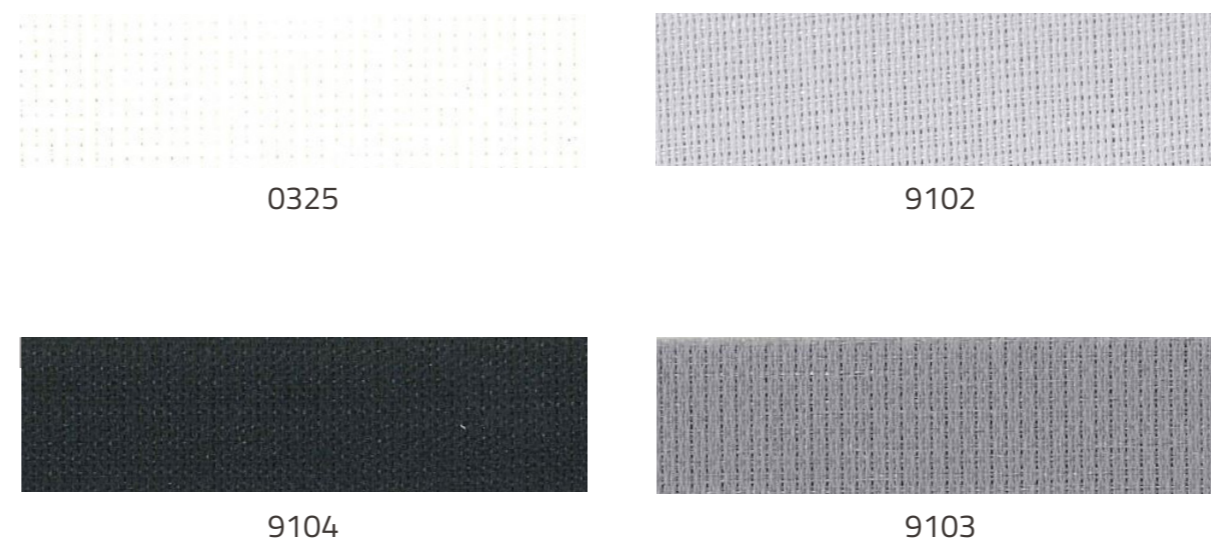

DOMICET BASEL PERLEX - 3041

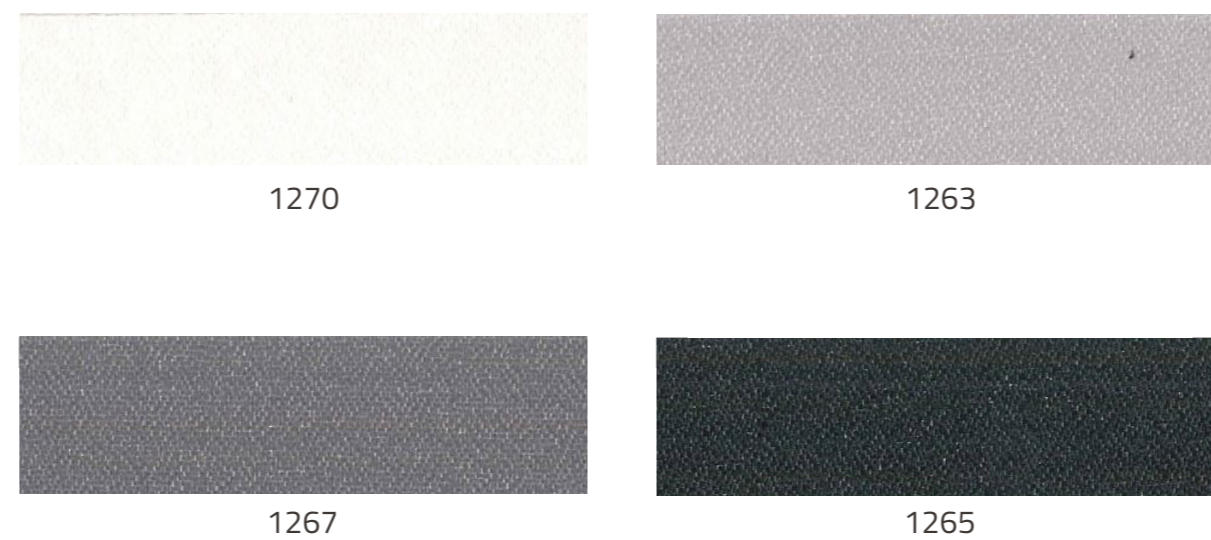

DOMICET DUBAI - 3042, with metallized back

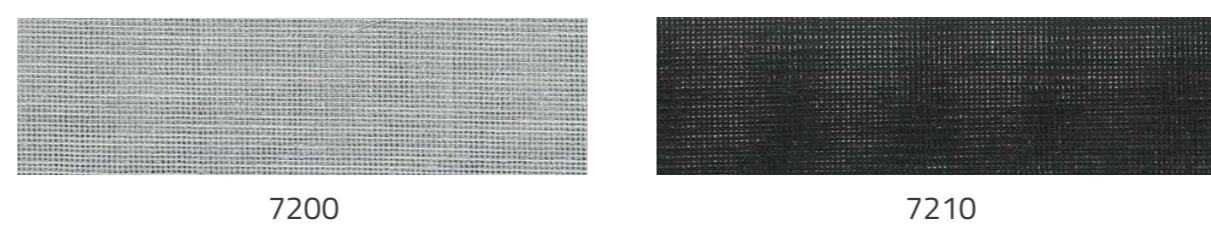

PRODUCT SPECIFICATION - crepe



Description	Crepe 3043
Material	100 % polyester
Weight	77 g /m ²
Thickness	0,24 mm
Light fastness	minimum 5
Pleat width	20 mm
Roll width	190 cm
Moisture-proof	yes
Ökötex Standard 100	yes

Color	Light reflection	Light absorption	Light transmission
1500 White	51 %	2 %	47 %
1501 Beige	50 %	5 %	45 %
1502 Sand	42 %	15 %	43 %
1503 Light brown	38 %	25 %	37 %
1504 Orange	32 %	40 %	28 %
1505 Yellow	38 %	21 %	41 %
1506 Light green	38 %	25 %	37 %
1507 Blue	16 %	65 %	19 %
1508 Dark blue	4%	90 %	6 %
1509 Black	2 %	95 %	3 %
1510 Grey	26 %	48 %	26 %
1511 Light grey	44 %	11 %	45 %

PRODUCT SPECIFICATION - cetus



Description	White 0325	Silver 9102	Stone 9103	Black 9104
Material	Trevira CS	Trevira CS	Trevira CS	Trevira CS
Weight	140 g/m ²	140 g/m ²	140 g/m ²	140 g/m ²
Thickness	0,30 mm	0,30 mm	0,30 mm	0,30 mm
Light fastness	5-6	5-6	5-6	5-6
Pleat width	20 mm	20 mm	20 mm	20 mm
Roll width	220 cm	220 cm	220 cm	220 cm
Moisture-proof	yes	yes	yes	yes
Flame retardant	DIN 4102 B1	DIN 4102 B1	DIN 4102 B1	DIN 4102 B1
Light reflection	51 %	44 %	31 %	4 %
Light transmission	46 %	38 %	27 %	6 %
Light absorption	3 %	18 %	42 %	90 %
Solar reflection	49 %	46 %	40 %	26 %
Solar transmission	47 %	43 %	38 %	28 %
Solar absorption	4 %	11 %	22 %	46 %



domicet

pleated

PRODUCT SPECIFICATION - basel perlex



Description	White 1270	Grey 1263	Dark grey 1267	Black 1265
Material	100 % PES	100 % PES	100 % PES	100 % PES
Weight	94 g/m ²	94 g/m ²	94 g/m ²	94 g/m ²
Thickness	0,17 mm	0,17 mm	0,17 mm	0,17 mm
Light fastness	5-7	5-7	5-7	5-7
Pleat width	20 mm	20 mm	20 mm	20 mm
Roll width	225 cm	225 cm	225 cm	225 cm
Moisture-proof	yes	yes	yes	yes
Flame retardant	yes	yes	yes	yes
Ökötex-Standard 100	yes	yes	yes	yes
Light reflection	66 %	60 %	49 %	36 %
Light absorption	4 %	20 %	41 %	63 %
Light transmission	30 %	20 %	10 %	1 %
UV transmission		3 %	2 %	0,1 %

PRODUCT SPECIFICATION - dubai



Description	Light grey / silver 7200	Black / silver 7210
Material	Trevira CS	Trevira CS
Weight	84 g/m ²	84 g/m ²
Thickness	0,20 mm	0,20 mm
Light fastness	5-7	5-7
Pleat width	20 mm	20 mm
Roll width	230 cm	230 cm
Moisture-proof	yes	yes
Flame retardant	B1, M1	B1, M1
PVC free	yes	yes
Ökötex Standard 100	yes	yes

Description	Light grey / silver 7200	Black / silver 7210
Solar reflection	42 %	40 %
Solar trans.	26 %	25 %
Solar absorption	32 %	35 %
Light reflection	41 %	37 %
Light trans.	26 %	23 %
Light absorption	33 %	40 %
UV transmission	25 %	24 %
Openness factor	19 %	20 %
gtot value	0,43	0,44
Fc value	0,66	0,69